

Figure 1

0097ED-0E292560

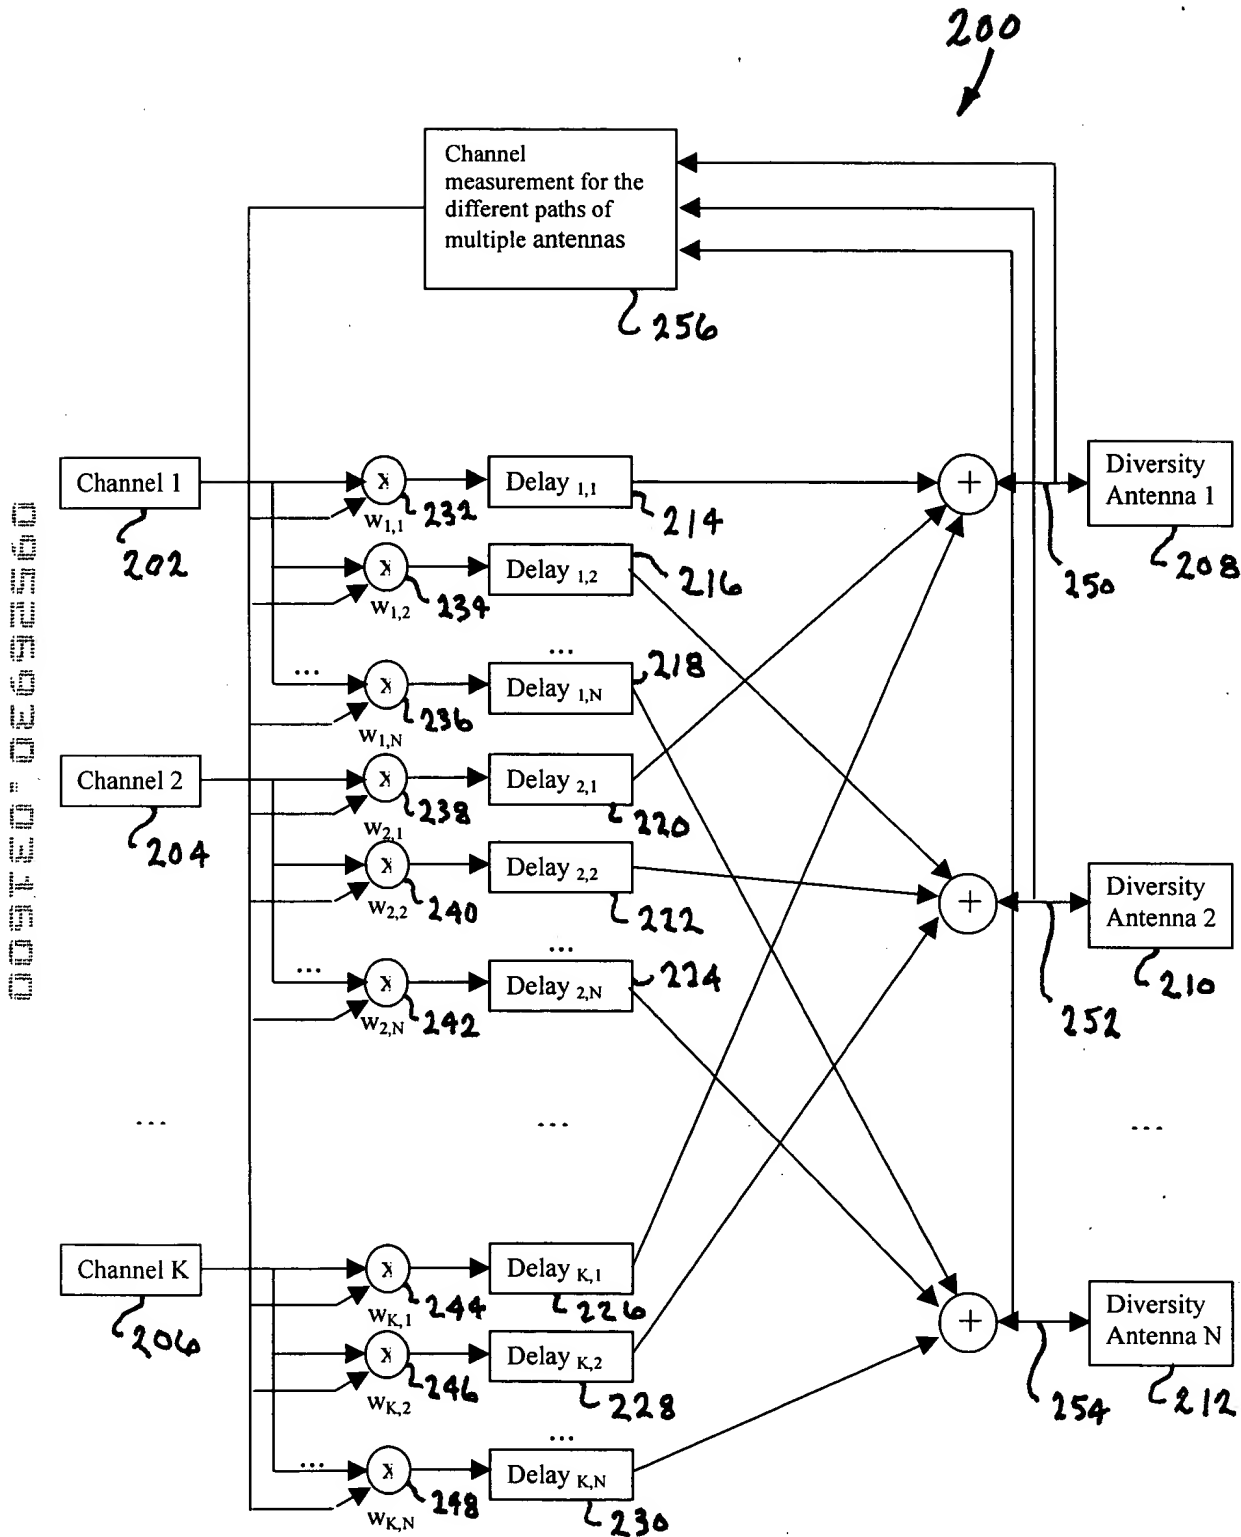


Figure 2

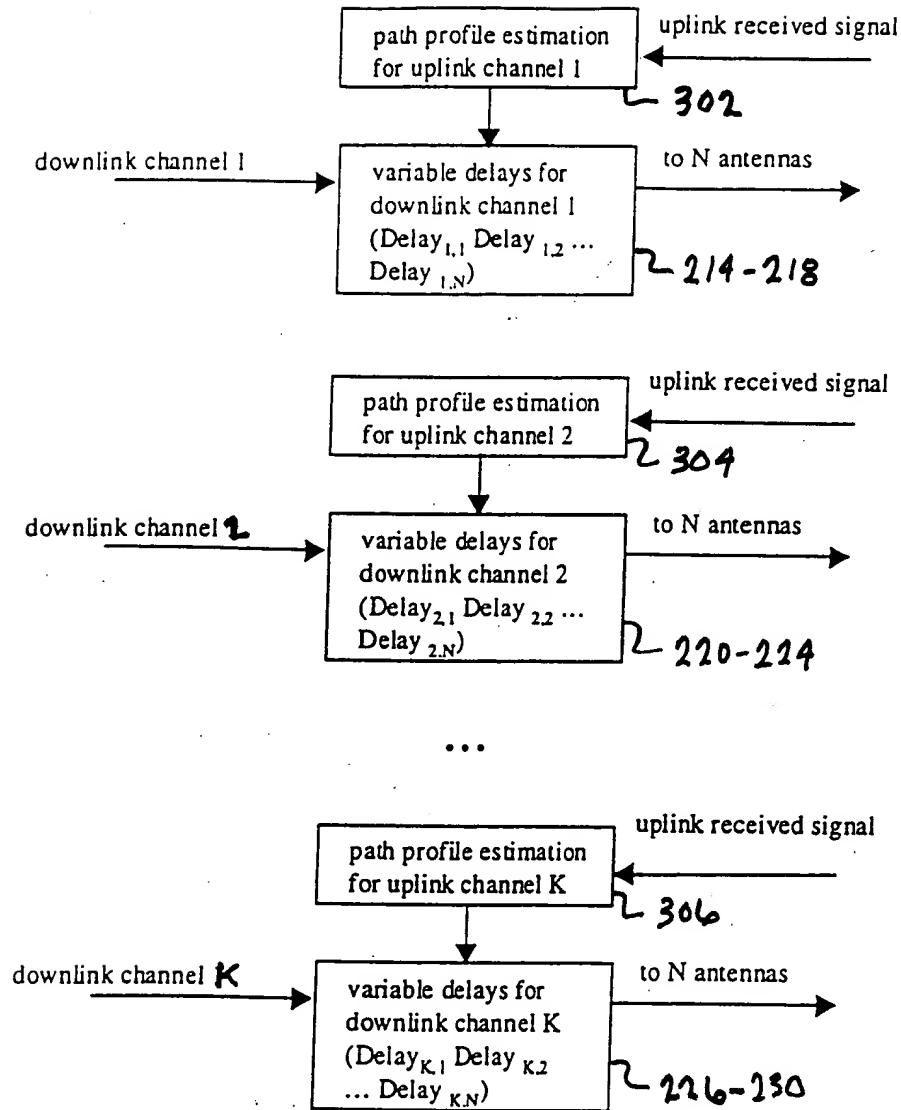


Figure 3: Method of choosing delays for each channel.

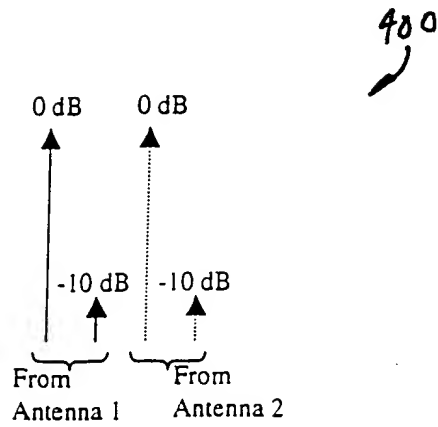


Figure 4: Delay profile at the mobile with delay of 2 chips between the two transmit antennas.

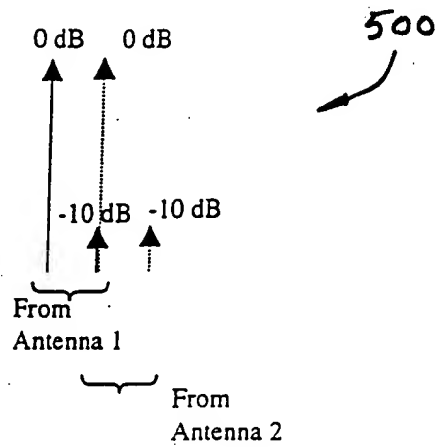


Figure 5: Delay profile at the mobile with delay of 1 chip between the two transmit antennas.

005120 DEB92560

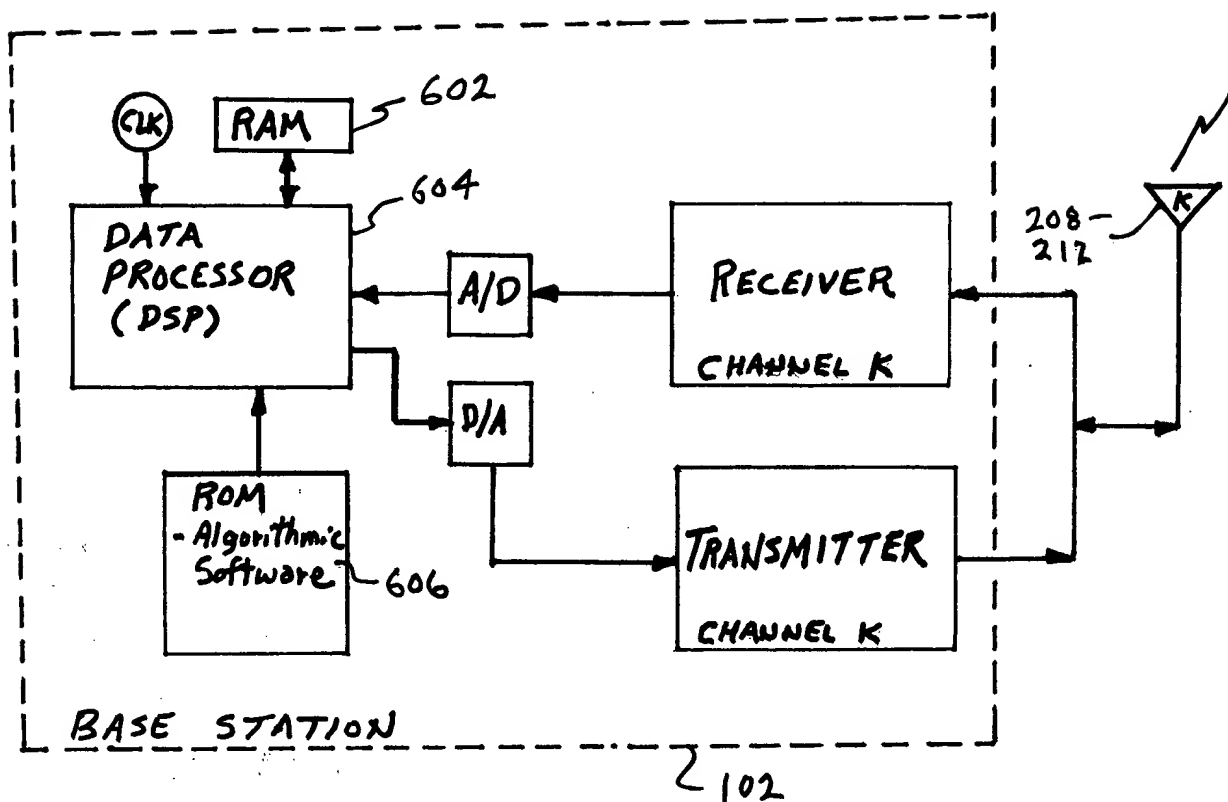


Figure 6

00970-0695560

700

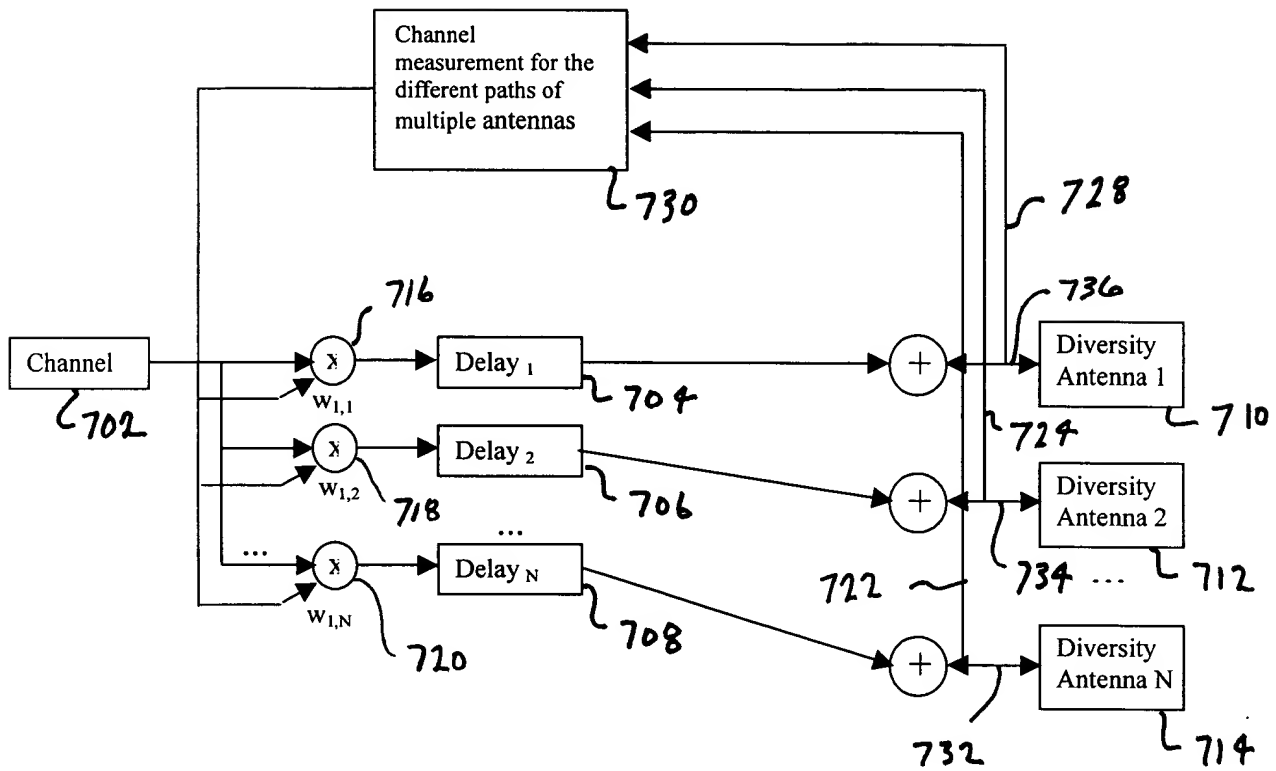


Figure 7